

Digital audio recording and reproducing apparatus

Publication number: TW479220 (B)

Publication date: 2002-03-11

Inventor(s): KOBAYASHI NOBUYUKI [JP]; FUJII KEN [JP]

Applicant(s): TDK CORP [JP]

Classification:

- international: **G11C7/16; G11C7/00; (IPC1-7): G10L19/00; G06F3/16**

- European: G11C7/16

Application number: TW19990119641 19991110

Priority number(s): JP19980318810 19981110; JP19990179670 19990625;
JP19990179738 19990625; JP19990179739 19990625;
JP19990179951 19990625

Also published as:



EP1001428 (A2)



EP1001428 (A3)




US2006116780 (A1)



CN1257270 (A)

Abstract of TW 479220 (B)

In a digital audio recording and reproducing apparatus, an analog audio signal supplied from a microphone is converted into digital audio data, and after compressing the digital audio data such that the analog audio signal of sixty seconds is converted into digital data of not larger than 100 K bytes, compressed digital audio data is stored in an internal solid state memory and/or external solid state memory as data file having a file format which can be directly treated by an external computer. Upon reproduction, after decompressing the digital audio data read out of the memory, decompressed digital audio data is converted into an analog audio signal, and the thus converted analog audio signal is reproduced by a speaker or earphone. The digital audio data file stored in the memory can be directly, and easily transferred to the computer within a short time by means of the external memory, connection cable, communication line and transmitter without using special connection cable and data format converting driver software. Digital audio data can be also transferred from the computer to the digital audio recording and reproducing apparatus in a similar manner.

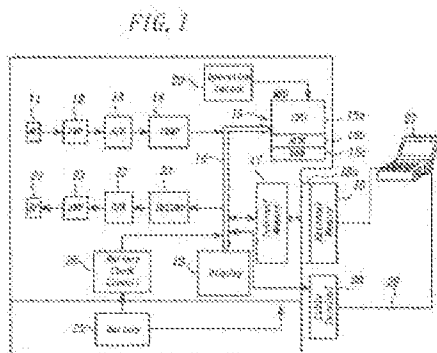

Data supplied from the **esp@cenet** database — Worldwide